


KD-PVC KD-PU

钢丝加强型软管

Hoses – with steel wire reinforcement

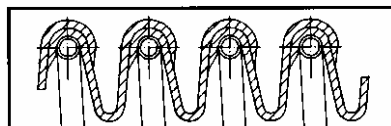

结构: KD-PVC: 管壁采用软质 PVC, 硬度为邵氏 70A; KD-PU: 管壁采用聚氨酯材料, 硬度为邵氏 85A。

特性: 弯曲非常灵活, 可以拉伸至原长度的 2-3 倍, 放开立即恢复至原长度。

应用: 家用真空吸尘器, 工业抽取设备, 烟尘抽取, 医疗器械, 干燥机等。

温度范围: PVC: -10°C - +70°C,

PU: -40°C - +90°C (短时间内可达+110°C)

管壁标准色: PVC: 灰色, PU: 黑色

螺旋方向: 左手螺旋

Structure: KD-PVC: outer bore of soft PVC, Shore A ~70; KD-PU: outer bore of polyurethane, Shore A ~85;

KD-PVC and KD-PU: PVC-coated spring steel spiral welded to outer bore.

Characteristics: Highly flexible hose which can be extended to two or three times its normal length; it returns to normal length when released.

Applications: Household vacuum cleaners, industrial extractor equipment, dust and fume extraction, medical technology, driers etc.

Temperature range: PVC: -10°C to +70°C

PU: -40°C to +90°C (+110°C short term)

Colour: PVC: grey, PU: black

Spiral pitch: left-hand

内径 $\varnothing = d$	外径 $\varnothing = D$	弯曲半径	重量	负压	长度			长度	产品代码
I.D. $\varnothing = d$	O.D. $\varnothing = D$	r (min.)	Weight	Vacuum	Length			Length	Part-No.
毫米 mm	毫米 mm	毫米 mm	克/米 g/m	mbar	压缩 Block 毫米 mm	静止 resting 毫米 mm	拉伸 extended 毫米 mm	米 m	
KD-PVC									灰色 /grey
20	29	r = D	340	600	1000	1000	2500	max. 3 - 5 m	71 7003 020 000
22	31		380	550					71 7003 022 000
25	34		430	550					71 7003 025 000
28	37		480	500					71 7003 028 000
30	39		510	500					71 7003 030 000
32	41		540	500					71 7003 032 000
38	47		650	450					71 7003 038 000
40	49		910	450					71 7003 040 000
44	53		1000	450					71 7003 044 000
51	60	1160	400					71 7003 051 000	
KD-PU									黑色 /black
29	35	r = D	300	700	600	1000	1800	max. 3 - 5 m	71 7806 029 000
32	38		330	650	600	1000	1800		71 7806 032 000
35	41		360	600	600	1000	1800		71 7806 035 000

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C.

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).

内径 $\varnothing = d$	外径 $\varnothing = D$	弯曲半径	重量	负压	长度			长度	产品代码
I.D. $\varnothing = d$	O.D. $\varnothing = D$	r (min.)	Weight	Vacuum	Length			Length	Part-No.
毫米 mm	毫米 mm	毫米 mm	克/米 g/m	mbar	固定 Block 毫米 mm	静止 resting 毫米 mm	拉伸 extended 毫米 mm	米 m	
KD-PVC									灰色 /grey
20	29	r = D	340	600	1000	1000	2500	最长 3 - 5 米	71 7003 020 000
22	31		380	550					71 7003 022 000
25	34		430	550					71 7003 025 000
28	37		480	500					71 7003 028 000
30	39		510	500					71 7003 030 000
32	41		540	500					71 7003 032 000
38	47		650	450					71 7003 038 000
40	49		910	450					71 7003 040 000
44	53		1000	450					71 7003 044 000
51	60		1160	400					71 7003 051 000
KD-PU									黑色 /black
29	35	r = D	300	700	600	1000	1800	最长 3 - 5 米	71 7806 029 000
32	38		330	650	600	1000	1800		71 7806 032 000
35	41		360	600	600	1000	1800		71 7806 035 000

如需其他内径和管壁颜色，欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问，请将应用告知我们，我们非常高兴提供建议给您。如需其他规格软管（如：其他的内径、管壁颜色和公差），欢迎来电垂询。
 注：以上数据基于常温 20℃。

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.
 Technical Data (at 20℃).