



K1H-L

钢丝加强型软管

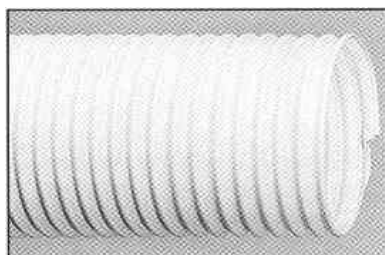

结构: 管壁材料: 软 PVC, 硬度为邵氏 70A, 由 PVC 包覆的弹性钢丝螺旋熔接于管壁。

特性: 壁薄, 重量轻, 高柔韧, 易压缩至约35%的长度。

应用范围: 适合家用的轻便软管, 如厨房排油烟机, 衣服烘干机, 屋顶通风系统等。

温度范围: -10°C - +70°C

管壁标准色: 白色

螺旋方向: 左手螺旋

Hoses – with steel wire reinforcement

Structure: Outer bore soft PVC, Shore A ~70; PVC-coated spring steel spiral; welded to outer bore.

Characteristics: Thin-walled, light, highly flexible hose, easily compressible to approx. 35% of its length.

Applications: Light hose for household use e.g. in kitchen fume extractors, clothes' driers, roof ventilation systems etc.

Temperature range: -10°C to +70°C

Colour: white

Spiral pitch: left-hand

Innen $\varnothing = d$	Außen $\varnothing = D$	r (mind.)	Gewicht	≈ Belastbarkeit	Fertigungs- länge	Bestell-Nr.
I.D. $\varnothing = d$	O.D. $\varnothing = D$	r (min.)	Weight	Load Capacity	Length	Part-No.
mm	mm	mm	≈ g/m	Vakuum Vacuum mbar	m	
32	37	16	180	140	10	74 2811 032 000
38	43	20	220	130		74 2811 038 000
51	56	26	290	110		74 2811 051 000
60	65	30	340	90		74 2811 060 000
76	81	38	435	85		74 2811 076 000
80	85	40	455	70		74 2811 080 000
90	95	45	510	60		74 2811 090 000
102	105	50	580	50		74 2811 102 000

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

Je nach Einbau- oder Betriebsverhältnissen können die Vakuum- bzw. Druckwerte von der Tabelle abweichen. Bitte schildern Sie uns im Zweifelsfall Ihren Einsatz, wir beraten sie gern. Zwischengrößen, andere Längen und Farben, abweichende Toleranzen etc. sind nach Vereinbarung lieferbar.
 Technische Werte (bei +20°C).

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.
 Technical Data (at 20°C).