


KA-GH-PU

塑筋加强型软管

Hoses – with plastic reinforcement

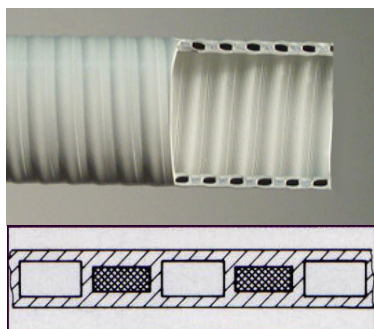

结构: 双层结构, 弯曲灵活的聚氨酯软管, 内外壁平滑, 硬质 PVC 塑筋螺旋加强, 塑筋间中空。

应用范围: 牙科和医疗器械专用软管

温度范围: -5°C - +60°C

管壁标准色: 黑色、灰色和白色

Structure: double walled, flexible polyurethane hose, inside and outside smooth, with hard-PVC-helix and hollow running parallel to helix

Applications: special hose for dental and medical appliances

Temperature range: -5°C to +60°C

Colour: black, grey and white

内径 $\varnothing = d$ I.D. $\varnothing = d$		外径 $\varnothing = D$ O.D. $\varnothing = D$		弯曲半径 (最小值) r (min.)	重量 Weight	= 负荷能力 = Load capacity 负压 Vacuum 毫巴 mm	长度 Length	产品代码 Part-No.
毫米 mm	公差 Tolerance	毫米 mm	公差 Tolerance	毫米 mm	克/米 ca. g/m		米 m	
8	+/- 0,5	12	+/- 0,8	10	80	300	10	2-88xx-008-00
11		15		13	90	290		2-88xx-011-00
12		16		13	90	280		2-88xx-012-00
13		17		13	90	280		2-88xx-0-1300
15		19		13	100	270		2-88xx-015-00
16		20		20	120	260		2-88xx-016-00
17		21		21	130	250		2-88xx-017-00
20		21		21	140	230		2-88xx-020-00
22		25		23	150	220		2-88xx-022-00
25		30		23	190	200		2-88xx-025-00
32		37		30	220	150		2-88xx-032-00

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。
注: 以上数据基于常温 20°C。

Stand: 05/2007

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.
Technical Data (at 20°C).