



## KA-GH

## 硬质 PVC 加强型软管

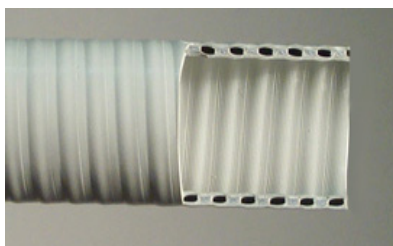

**结构:** 双层结构, 弯曲灵活的软质 PVC 管, 内外壁平滑, 硬质 PVC 塑筋螺旋加强, 塑筋间中空。

**应用范围:** 牙科器械专用软管。

**温度范围:** -5°C - +60°C

**管壁标准色:** 黑色、白色

## Hoses – with rigid PVC reinforcement

**Structure:** double walled, flexible soft-PVC-hose, inside and outside smooth, with rigid-PVC-helix and hollow running parallel to helix

**Applications:** special hose for dental appliances

**Temperature range:** -5°C to +60°C

**Colour:** black or white

| 内径 $\varnothing = d$<br>I.D. $\varnothing = d$ |                 | 外径 $\varnothing = D$<br>O.D. $= D$ |                 | 弯曲半径<br>(最小值)<br>$r$ (min.) | 重量<br>Weight  | = 负荷能力<br>= Load capacity | 长度<br>Length | 产品代码<br>Part-No.<br>White | 产品代码<br>Part-No.<br>Black |
|------------------------------------------------|-----------------|------------------------------------|-----------------|-----------------------------|---------------|---------------------------|--------------|---------------------------|---------------------------|
| 毫米<br>mm                                       | 公差<br>Tolerance | 毫米<br>mm                           | 公差<br>Tolerance | 毫米<br>mm                    | 克/米<br>ca.g/m | 负压<br>Vacuum<br>毫巴<br>mm  | 米<br>m       |                           |                           |
| 8                                              | +/- 0,5         | 12                                 | +/- 0,8         | 10                          | 80            | 250                       | 10           | 72 8211 008 000           | 72 8206 008 000           |
| 11                                             |                 | 15                                 |                 | 13                          | 90            | 240                       |              | 72 8211 011 000           | 72 8206 011 000           |
| 12                                             |                 | 16                                 |                 | 13                          | 90            | 230                       |              | 72 8211 012 000           | 72 8206 012 000           |
| 13                                             |                 | 17                                 |                 | 13                          | 90            | 230                       |              | 72 8211 013 000           | 72 8206 013 000           |
| 15                                             |                 | 19                                 |                 | 13                          | 100           | 220                       |              | 72 8211 015 000           | 72 8206 015 000           |
| 16                                             |                 | 20                                 |                 | 20                          | 120           | 210                       |              | 72 8211 016 000           | 72 8206 016 000           |
| 17                                             |                 | 21                                 |                 | 21                          | 130           | 200                       |              | 72 8211 017 000           | 72 8206 017 000           |
| 20                                             |                 | 25                                 |                 | 21                          | 140           | 180                       |              | 72 8211 020 000           | 72 8206 020 000           |
| 22                                             |                 | 27                                 |                 | 23                          | 150           | 170                       |              | 72 8211 022 000           | 72 8206 022 000           |
| 25                                             |                 | 30                                 |                 | 23                          | 190           | 150                       |              | 72 8211 025 000           | 72 8206 025 000           |

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。  
注: 以上数据基于常温 20°C。

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.  
Technical Data (at 20°C).