
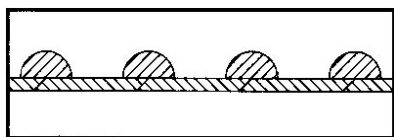


VC-PVC VC-PU

硬质 PVC 加强型软管

Hoses – with rigid PVC reinforcement

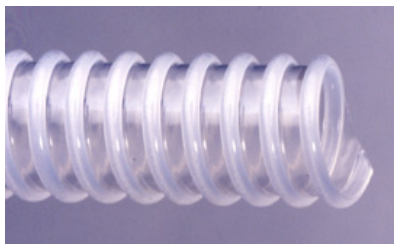

结构: VC-PVC 7340, 管壁材质: 软质 PVC, 螺旋材质: 抗冲击硬质 PVC。
VC-PU 7348, 管壁材质: PU, 螺旋材质: 抗冲击硬质 PVC。

特性: 全塑料软管, 内壁极光滑, 可在低压时使用, 质量轻, 弯曲灵活。PU 材质: 耐磨。

应用范围: 液体、气体和粉状物料的保护管和输送管。

温度范围:
VC-PVC: -10°C - +60°C
VC-PU : -20°C - +60°C

管壁标准色: 灰色、透明

螺旋方向: 右手螺旋

Structure: VC-PVC 7340, soft PVC wall; reinforcement spiral of impact resistant rigid PVC. VC-PU 7348, PU wall; reinforcement spiral of impact resistant rigid PVC.

Characteristics: An inside absolutely smooth full plastic hose, also applicable at low pressures; light, flexible. PU version: abrasion-resistant.

Applications: Protective and transport hose for liquid, gaseous and powder materials.

Temperature range:
VC-PVC: -10°C to +60°C
VC-PU: -20°C to +60°C

Colour: grey or transparent

Spiral pitch: right-hand

内径 $\varnothing = d$		弯曲半径	重量	≈ 负荷能力		长度	产品代码 (灰色)	产品代码 (透明)
I.D. $\varnothing = d$		r (min.)	Weight	≈ Load Capacity		Length	Part-No. grey	Part-No. transparent
毫米 mm	公差 Tolerance	毫米 mm	克/米 g/m	负压 Vacuum mbar	压力 Pressure mbar	米 m		
10	±0,5	10	70		2,5	10	73 4003 010 000	73 4800 010 000
13		13	90	800			73 4003 013 000	73 4800 013 000
20		20	140				73 4003 020 000	73 4800 020 000
25		25	180	500	1,5		73 4003 025 000	73 4800 025 000
32	±0,8	32	230				73 4003 032 000	73 4800 032 000
38		38	270				73 4003 038 000	73 4800 038 000
50		50	360	400	1,0		73 4003 050 000	73 4800 050 000
60		60	430				73 4003 060 000	73 4800 060 000

以上表各种的软管可以采用TPE、EVA、EEA、TPR、PA和PP材料

If necessary, other material combinations such as TPE, EVA, EEA, TPR, PA and PP can be used for the hose types described above.

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).