

VOR-1_7400

硬质 PVC 加强型软管

Hoses with rigid-PVC reinforcement



结构: 管壁材质: 软质 PVC, 螺旋材质: 优质硬 PVC

特性: 内壁极平滑的全塑料软管, 质量轻, 弯曲非常灵活

应用范围: 牙科吸管, 保护管

温度范围: -5°C - +60°C

管壁标准色: 灰色、褐色

螺旋方向: 右手螺旋

Structure: Soft PVC wall; reinforcement spiral of high quality rigid PVC.


Characteristics: An inside absolutely smooth full plastic hose, light, highly flexible.

Applications: Suction hose for dental appliances, protective hose.

Temperature range: -5°C to +60°C

Colour: grey or brown

Spiral pitch: right-hand

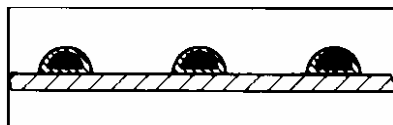

内径 $\varnothing = d$		外径 $\varnothing = D$		弯曲半径	重量	≈ 负荷能力	长度	产品代码 (灰色)	产品代码 (褐色)
I.D. $\varnothing = d$		O.D. $\varnothing = D$		r (minim)	Weight	≈ Load Capacity	Lenght	Part-No. grey	Part-No. brown
毫米 mm	公差 Tolerance	毫米 mm	公差 Tolerance	毫米 mm	克/米 g/m	真空 Vacuum mbar	米 m		
10					55	300		74 0007 010 000	
12		16,5			68	280		74 0007 012 000	
15	±0,5	18	±0,8	r = 2D	85	270	2,2	74 0007 015 000	
18		21,4			100	250		74 0007 018 000	
22		25,9			120	220		74 0007 022 000	
25		28,8			136	200		74 0007 025 000	

如需其他内径和管壁颜色, 欢迎来电垂询


Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。
 注: 以上数据基于常温 20°C。

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.
 Technical Data (at 20°C).

KA-VOR-1_7407

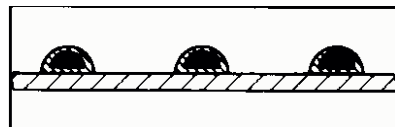

Schläuche mit Kunststoffwendel verstärkt

Aufbau: Wand aus Weich-PVC;
Wendel aus hochwertigem Hart-PVC.

Eigenschaften: Ein innen absolut glatter
Vollkunststoffschlauch, leicht, hochflexibel.

Anwendungsbereiche: Als Saugschlauch in
der Dental-Medizin und als Schutzschlauch.

Temperaturbereich: -5°C bis +60°C

Farbe: grau oder braun

Wendelsteigung: rechts

Hoses with rigid-PVC reinforcement

Structure: Soft PVC wall; reinforcement spiral
of high quality rigid PVC.

Characteristics: An inside absolutely smooth
full plastic hose, light, highly flexible.

Applications: Suction hose for dental
appliances, protective hose.

Temperature range: -5°C to +60°C

Colour: grey or brown

Spiral pitch: right-hand

Je nach Einbau- oder Betriebsverhältnissen können die Vakuum- bzw. Druckwerte von der Tabelle abweichen. Bitte schildern Sie uns im Zweifelsfall Ihren Einsatz, wir beraten sie gern. Zwischengrößen, andere Längen und Farben, abweichende Toleranzen etc. sind nach Vereinbarung lieferbar.
Technische Werte (bei +20°C).

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request.
Technical Data (at 20°C).