


VSM-E

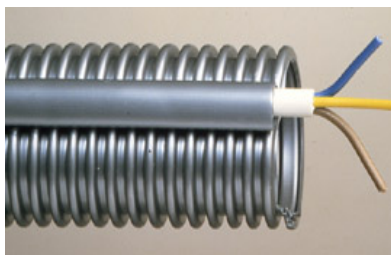

螺纹管

结构: 改性 EVA

特性: 质量轻, 弯曲非常灵活的螺纹管, 外壁沿软管轴线方向粘着小管, 可用于放置导电线, 例如: 2/3/4 芯 (注: 220V 电压)。

应用范围: 真空吸尘器机身至把手的软管, 也可作为喷雾设备上需要一定压力的软管。

螺旋方向: 左手螺旋

管壁标准色: 金属银

Profile hoses

Structure: Modified EVA.

Characteristics: Light, highly flexible profile hose with protective hose inserted alongside hose axis for input of electrical conductors, e.g. 2/3/4 core (electrical hose till 220 Volt).

Applications: With shortest guidance from vacuum cleaner to grip; also available for spray extraction unit with pressure hose.

Temperature range: -20°C to +60°C

Spiral pitch: left-hand

Colour: silver-metallic

内径 $\varnothing = d$		外径 $\varnothing = D$		弯曲半径 (最小值)	重量	≈ 负荷能力		长度	产品代码
I.D. $\varnothing = d$		O.D. $\varnothing = D$		r (min.)	Weight	≈ Load Capacity		Length	Part-No.
毫米 mm	公差 Tolerance	毫米 mm	公差 Tolerance	毫米 mm	克/米 g/m	负压 Vacuum mbar	压力 pressure bar	米 m	
32	±0,5	40	±0,7	60	300	5	-0,3		74 3200 032 000

* 按需定制

* on request

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).