


VSM-SO1

波纹管

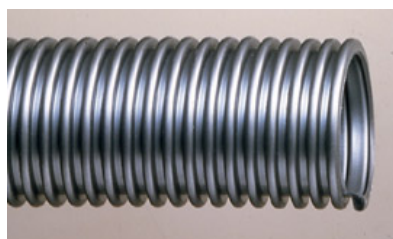

结构: 管壁材料: EVA

特性: 全塑料波纹管, 内壁平滑, 低流阻, 回弹性良好 (受到挤压或弯曲后, 迅速恢复原状), 弯曲非常灵活。备有符合食品级要求的软管供选用。

应用范围: 家用和工业用真空吸尘器。

温度范围: -50°C - +60°C

管壁标准色: 金属银

Profile hoses

Structure: EVA.

Characteristics: An inside smooth full plastic profile hose with low flow resistance, good resilience (when compressed or bent) and excellent flexibility; also available in a food-proof version.

Applications: Household and industrial vacuum cleaners.

Temperature range: -50°C to +60°C

Colour: silver-metallic

内径 $\varnothing = d$		外径 $\varnothing = D$		弯曲半径 (最小值)	重量	≈ 负荷能力		长度	产品代码
I.D. $\varnothing = d$		O.D. $\varnothing = D$		r (min.)	Weight	≈ Load Capacity		Length	Part-No.
毫米 mm	公差 Tolerance	毫米 mm	公差 Tolerance	毫米 mm	≈ 克/米 g/m	负压 Vacuum 毫巴 mbar	压力 pressure 巴 bar	米 m	
25	±0,7	33,0	±1,0	50	110	600	0,6	10/25	74 1125 025 000
27		35,5		60	130	600	0,6		74 1125 027 000
29		38,5		65	205	600	0,6		74 1125 029 000
32		40,5		70	275	500	0,5		74 1125 032 000
36		44,7		75	290	500	0,5		74 1125 036 000
37		45,1		80	295	500	0,5		74 1125 037 000
38		48,0		80	320	400	0,4		74 1125 038 000
50		61,0		120	420	250	0,25		74 1125 050 000

如需其它内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C

Stand: 04/2003

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).